



02/25/97

3M Office of Intellectual Property Counsel
PO Box 33427
St. Paul, Minnesota 55133-3427
612/733 1500

PATENT

Docket No.

53208USA1A

Application Transmittal Letter

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Inventor(s): Thomas L. Wood
Title: PROGRESSIVELY PERFORATED TAPE ROLL

- ☒ Enclosed is the above-mentioned new patent application. It includes 2 sheet(s) of formal drawings.
- ☒ Enclosed are an application assignment to Minnesota Mining and Manufacturing Company and a completed Assignment Recordation Cover Sheet.
- ☒ Enclosed is Declaration, Power of Attorney, and Petition.
- ☒ The fee for filing the application is computed as follows:

Claims As Filed					
(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Basic Fee	
Total Claims	11 -20 =	0	x \$22.	\$	\$770.
Independent Claims	3 -3 =	0	x \$78.	\$	
Additional fee for filing one or more multiple dependent claims			\$250.	\$	
Total amount due →				\$770.00	

- ☒ Please charge to Deposit Account 13-3723 any fees under 37 CFR 1.16 and 1.17 which may be required to file and during the entire pendency of this application. This authorization includes the fee for any extension of time under 37 CFR 1.136(a) that may be necessary. To the extent any such extension should become necessary it is hereby requested.

Registration Number	Telephone Number
32,477	612/736-1255
Date	
February 25, 1997	

Signature
Print Name
Charles D. Levine

Certificate of Express Mailing

- ☒ Pursuant to 37 CFR 1.10 I certify that this application is being deposited on the date indicated below with the United States Postal Service "Express Mail Post Office to Addressee" service addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

Express Mail Mailing Label No.
EM393421899
Date of Deposit
February 25, 1997

Signature of Person Mailing Application
Printed Name of Person Mailing Application
Charles D. Levine

08806186 "PATENT" 65705

PROGRESSIVELY PERFORATED TAPE ROLL

5

TECHNICAL FIELD

The present invention relates to tape rolls. More particularly, the present invention relates to perforated tape rolls.

10

BACKGROUND OF THE INVENTION

Most rolls of tape are used by first removing a length of tape from the roll before using the tape for its intended purpose. Typically, a length of tape is peeled from the roll and is cut for use. In some applications, the tape is used while on the roll and is removed after use.

Lint removal tape is used while still on a roll to remove lint and other small particles from fabric, such as clothing. The tape is removed from the roll only after use, to discard it. In roll form, lint removal tape is typically wound on a core with the adhesive side of the tape wound outwardly for use. A roll of lint removal tape is generally used on an applicator. Various lint removal tape rolls are known, such as those described in U.S. 5,027,465 and U.S. 5,388,300.

Rolls of tape are often perforated for easier removal of individual sheets. Material that has perforations and is wound into a roll becomes wavy and distorted because the perforations create a high spot in the roll due to pushed up material. Aligning perforations on a roll with each line of perforations substantially radially above the line of perforations on the sheet below it forms a lump in the roll. With a roll of 60 sheets, this can create a lump over 0.63 cm

(0.25 in) high. This makes the roll out-of-round, making the roll difficult to unwind and use.

Also, with aligned lines of perforation, a user has difficulty determining which sheet to grab to
5 remove a sheet. The user may grab more than one sheet, wasting material and often causing the material to tear improperly, in a downweb, longitudinal direction. Improper tearing also occurs without aligned perforations, where sheets have equal length and an
10 outer sheet does not necessarily cover the adjacent inner sheet. There is a need for a perforated tape roll with improved cross-web tearability.

SUMMARY OF THE INVENTION

15 A length of tape has a first longitudinal end, a second longitudinal end, a first side edge, and a second side edge. The tape includes a backing layer and an adhesive layer on the backing layer. The tape is formable into a roll having a plurality of wraps.

20 A plurality of lines of perforations extend across at least most of the width of the tape between the first and second side edges to separate the tape into sheets. The sheets have progressively increasing lengths from the first end to the second end such that,
25 when the sheets are wound into a roll, each sheet is longer than the sheet underneath it.

When the tape forms a roll, the outermost sheet has a free, leading edge and a trailing end defined by a line of perforations. The outermost sheet covers all
30 of the lines of perforations. The line of perforations that defines the trailing end of the outermost sheet prevents the outermost sheet from adhering tightly to itself. This reduces instances of the tape tearing in a downweb direction.

35

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a roll of tape of the present invention.

Figure 2 is a top view of a portion of tape.

5 Figure 3 is a side view of the tape of Figure 2.

Figure 4 is a side view of the roll of tape of Figure 1.

DETAILED DESCRIPTION

10 Figures 1-3 show a roll 10 of lint removal tape 12. As shown in Figure 2, the tape 12 has a first longitudinal end 14, a second longitudinal end 16, a first side edge 18, and a second side edge 20. As shown in Figure 3, the tape is formed of at least two
15 layers, a backing layer 22 and an adhesive layer 24 and can be made from any known materials. The tape is formable into a roll having a plurality of wraps.

 The backing layer 22 has a first side 26 and a second side 28 and can be made of, for example, paper
20 or plastic film. Suitable paper backings include saturated flatstock and crepe. Suitable plastic film backings include polypropylene, polyethylene, copolymers of polypropylene and polyethylene, polyesters, and vinyl acetates. The polypropylene can
25 be biaxially oriented polypropylene (BOPP) or simultaneously biaxially oriented polypropylene (SBOPP). The backing material can be compostible, degradable, colored, printed, and can be of different surface textures or embossed.

30 The adhesive layer 24 is placed on the first side 26 of the backing layer 22. It can be formed on the entire first side, or the backing layer can be uncoated by adhesive along one or both side edges. Alternatively, the side edges can be adhesive coated

and then detackified by using waxes, lacquers, or inks for example.

The adhesive can include hotmelt-coated formulations, transfer-coated formulations, solvent-coated formulations, and latex formulations. Useful adhesives according to the present invention include all pressure sensitive adhesives. Pressure sensitive adhesives are normally tacky at room temperature and can be adhered to a surface by application of, at most, light finger pressure. Examples of adhesives useful in the invention include those based on general compositions of polyacrylate; polyvinyl ether; diene-containing rubber such as natural rubber, polyisoprene, and polyisobutylene; polychloroprene; butyl rubber; butadiene-acrylonitrile polymer; thermoplastic elastomer; block copolymers such as styrene-isoprene and styrene-isoprene-styrene block copolymers, ethylene-propylene-diene polymers, and styrene-butadiene polymer; poly-alpha-olefin; amorphous polyolefin; silicone; ethylene-containing copolymer such as ethylene vinyl acetate, ethylacrylate, and ethyl methacrylate; polyurethane; polyamide; epoxy; polyvinylpyrrolidone and vinylpyrrolidone copolymers; polyesters; and mixtures of the above. Additionally, the adhesives can contain additives such as tackifiers, plasticizers, fillers, antioxidants, stabilizers, pigments, diffusing particles, curatives, and solvents.

A general description of useful pressure sensitive adhesives may be found in Encyclopedia of Polymer Science and Engineering, Vol. 13, Wiley-Interscience Publishers (New York, 1988). Additional description of useful pressure sensitive adhesives may be found in Encyclopedia of Polymer Science and Technology, Vol. 1, Interscience Publishers (New York, 1964).

465220" 93T90880

The tape 12 is formed into a roll 10 having a plurality of wraps with the adhesive layer 24 facing outwardly by rolling the tape on only itself. Support material, such as a core, a liner, or any other

5 material that could lend support and provide rigidity and strength to the roll of tape, is optional. In the illustrated embodiments, none is used.

The roll 10 of tape could also include a third layer. A low adhesion backside (LAB) layer 30 can be

10 formed on the second side 28 of the backing layer 22 to facilitate removing the outer wrap of tape from the roll 10. Suitable LAB layers include silicones, fluorochemicals, acrylates, and polyvinylacetates. Numerous other layers can be added to the tape, such as

15 primers to increase the adhesion of adhesive layer 24 to backing layer 22. Also, printed material can be located on the first side of the backing layer under the adhesive, or on the second side of the backing layer either under or over any LAB layer 30. This

20 printed material can be advertising, instructions, or other information. The tape could contain deodorants, perfumes, antistatic materials, and encapsulated cleaning chemicals. Also, the backing layer 22 can be modified by flame treatment, corona treatment, and

25 roughening.

A plurality of lines of perforations 32 divide the tape into discrete sheets, to help remove the outer wrap of tape from the roll 10. The perforations 32 are made before the tape 12 is formed into a roll 10. Each

30 sheet is defined by the first and second side edges 18, 20, and two adjacent lines of perforations 32.

There are n lines of perforations 32 extending across at least most of the width of the tape 12 between the first and second side edges 18, 20 to

35 separate the tape into n+1 sheets. The plurality of

lines of perforations 32 can extend partially or completely across the width of the tape. The sheets have progressively increasing lengths from the first longitudinal end 14 to the second longitudinal end 16 such that when the sheets are wound into a roll each sheet is longer than the sheet underneath it.

When the tape 12 forms a roll 10, the outermost sheet 34 has a free, leading edge 36 and a trailing end 38 defined by a line of perforations. As shown in Figure 4, the outermost sheet 34 covers all of the lines of perforations 32. Starting from the inside of the roll 10, each line of perforations 32 can be said to advance with each additional wrap of tape. When the tape is wound into a roll, each sheet completely covers the sheet before it.

The line of perforations that defines the trailing end 38 of the outermost sheet prevents the outermost sheet from adhering tightly to itself. This reduces instances of the tape tearing in a downweb direction nonparallel to the line of perforations. This occurs because the perforations act as a detackified area. In one embodiment (such as where the perforating knife has a longer side on the downweb side of the tape), during the perforating process, at least some of the perforations in each line create folded over material (with adhesive facing down, away from the outer sheets), are slightly higher, and have holes. These features individually and in combination act as a detackified area. Also, a pull roll can be overdriven to elongate the perforated area and make a larger detackified area. Thus, the line of perforations below the outermost sheet (which define the trailing end of the outermost sheet) helps remove this sheet.

CLAIMS

1. A length of tape having a first longitudinal end, a second longitudinal end, a first side edge, and
5 a second side edge and comprising:
a backing layer having a first side and a second side;
an adhesive layer on the first side of the backing layer, wherein the tape is formable into a roll having
10 a plurality of wraps; and
a plurality of lines of perforations extending across at least most of the width of the tape between the first and second side edges to separate the tape into sheets, wherein the sheets have progressively
15 increasing lengths from the first longitudinal end of the tape to the second longitudinal end of the tape such that, when the sheets are wound into a roll, each sheet is longer than the sheet underneath it by an overlap length.
20
2. The tape of claim 1 wherein the tape is wrapped into a roll with the outermost sheet having a free, leading edge and a trailing end defined by a line of perforations, wherein the outermost sheet covers all
25 of the lines of perforations.
3. The tape of claim 1 wherein the line of perforations that defines the trailing end of the outermost sheet prevents the outermost sheet from
30 adhering tightly to itself to reduce instances of the tape tearing in a downweb direction nonparallel to the line of perforations.

4. The tape of claim 3 wherein at least some of the perforations comprise folded over material with adhesive facing down, away from the outer sheets to create a slightly higher detackified area.

5

5. The tape of claim 1 wherein each sheet, compared to the adjacent sheet closer to the first longitudinal end, is longer by an amount equal to π times twice the thickness of the tape plus a selected overlap length.

6. The tape of claim 5 wherein the overlap length is no more than 0.635 cm (0.250 in).

15

7. The tape of claim 1 wherein the plurality of lines of perforations extend across the entire width of the tape from the first side edge to the second side edge.

20

8. The tape of claim 1 wherein the backing layer comprises at least one of paper and plastic.

9. The tape of claim 1 which is a lint removal tape.

25

10. A roll of tape wherein the tape has a first longitudinal end, a second longitudinal end, a first side edge, and a second side edge, the roll of tape comprising:

30

a backing layer having a first side and a second side;

an adhesive layer on the first side of the backing layer, wherein the tape is formed into a roll having a plurality of wraps; and

08806196 022297 465220 98790880

a plurality of lines of perforations extending across at least most of the width of the tape between the first and second side edges to separate the tape into sheets such that starting from the inside of the roll, each line of perforations can be said to advance with each additional wrap of tape to create sheets having progressively increasing lengths from the first longitudinal end of the tape to the second longitudinal end of the tape, wherein when the sheets are wound into a roll, each sheet is longer than the sheet underneath it by an overlap length.

11. A length of substrate having a first longitudinal end, a second longitudinal end, a first side edge, and a second side edge, wherein the substrate is formable into a roll having a plurality of wraps and comprising a plurality of lines of perforations extending across at least most of the width of the substrate between the first and second side edges to separate the substrate into sheets, wherein the sheets have progressively increasing lengths from the first longitudinal end of the substrate to the second longitudinal end of the substrate such that, when the sheets are wound into a roll, each sheet is longer than the sheet underneath it by an overlap length.

ABSTRACT OF THE DISCLOSURE

A tape includes a backing layer and an adhesive layer formed on the backing layer. A plurality of
5 lines of perforations extend across the tape to separate the tape into sheets. The sheets have progressively increasing lengths such that, when the sheets are wound into a roll, each sheet is longer than the sheet underneath it. When in a roll, the outermost
10 sheet covers all of the lines of perforations to reduce instances of the tape tearing in a downweb direction.

08005133-022397

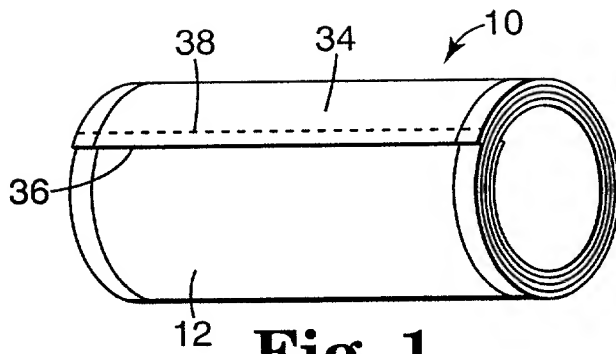


Fig. 1

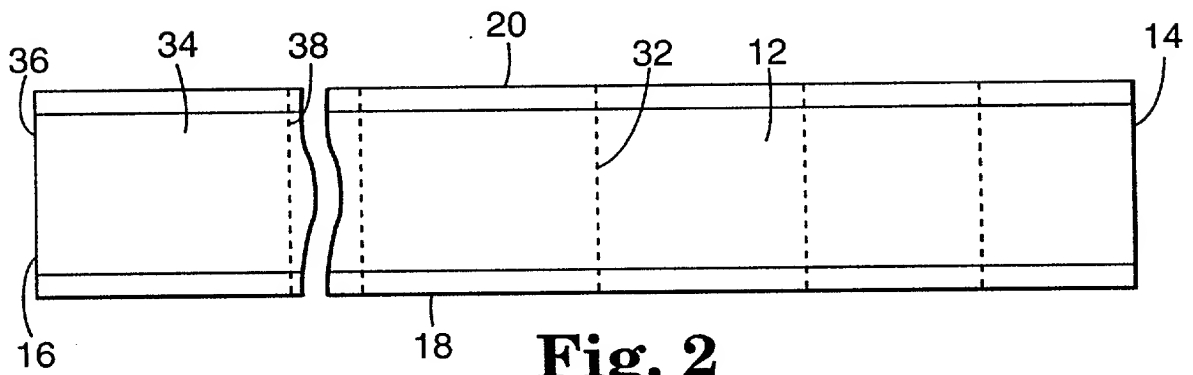


Fig. 2

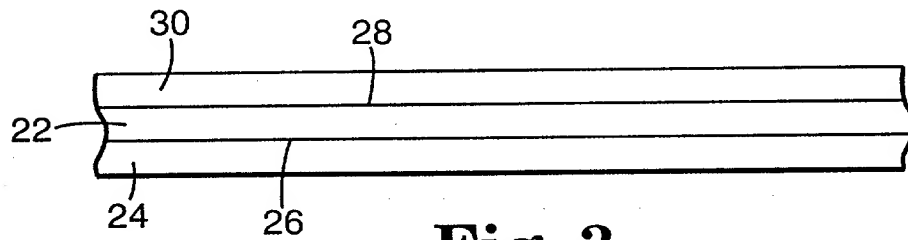


Fig. 3

2025 RELEASE UNDER E.O. 14176

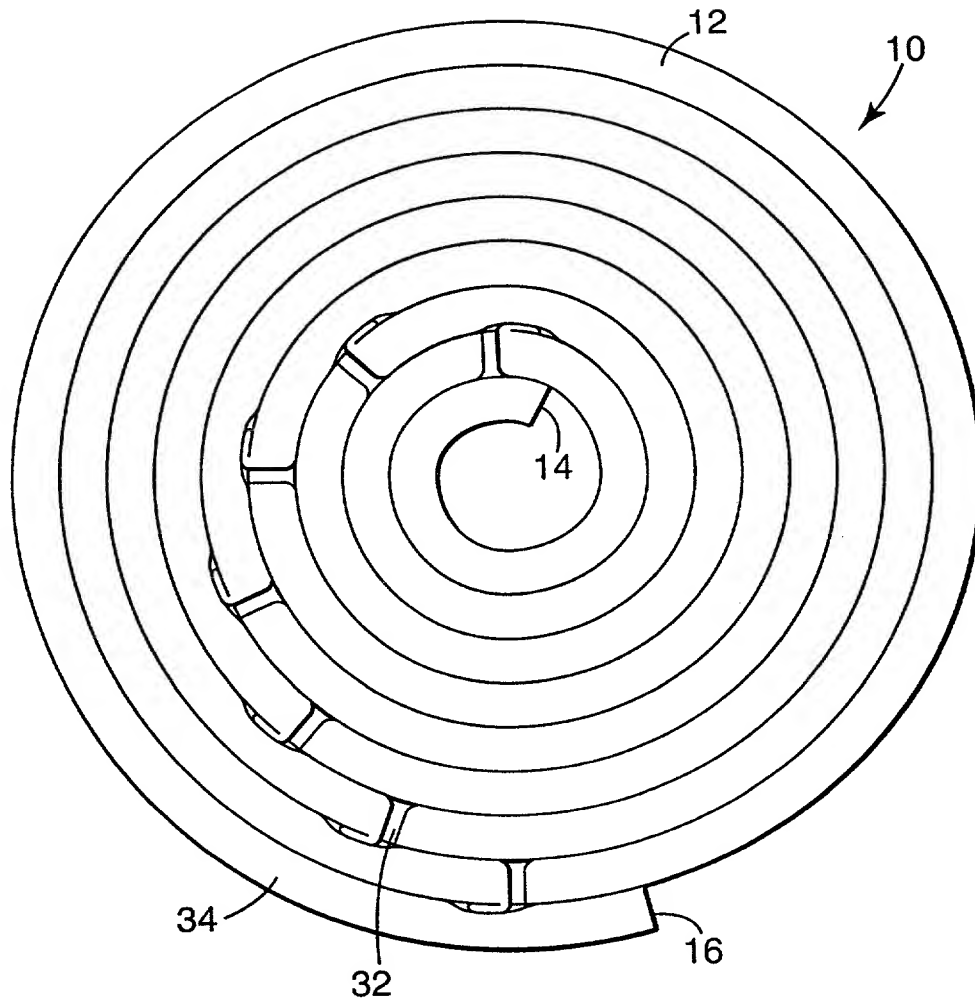


Fig. 4

I, a below named inventor, depose and say that: (1) my residence, citizenship, and mailing address is indicated below; (2) I have reviewed and understand the contents of attached specification, including the claims, as amended by any amendment specifically referred to herein, (3) I believe that I am the original, first, and sole inventor or discoverer of the invention or discovery in

described and claimed therein and for which a patent is sought; and (4) I hereby acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56.*

Attention: Charles D. Levine
3M Office of Intellectual Property Counsel
P.O. Box 33427
St. Paul, Minnesota 55133-3427
Telephone No. (612) 733-1500

The undersigned petitioner declares further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Wherefore, I pray for grant of Letters Patent for the invention or discovery described and claimed in the attached specification and I hereby subscribe my name to the foregoing specification and claims, oath, power of attorney, and this petition, on the day set forth below.

2-25-97
Date

Residence: Maplewood, Minnesota, USA
Citizenship: United States of America
Post Office: P.O. Box 33427
Address: St. Paul, Minnesota 55133-3427

Caroline S. Gibbs
Witness